



SemiRigid 1050
Stripping Machine for Semi-Rigid Coaxial Cables

STRIPPING

SemiRigid 1050

Application Range |


The Schleuniger SemiRigid 1050 is designed for stripping conventional semi-rigid coaxial cable from 0.86 mm (0.034") up to 4.5 mm (0.177") O. D. Thanks to the predefined cable types and the intuitive data input, cable programs can be created and stored within a very short time.

Function |

The operator inserts the cable and starts the stripping process by pressing the footpedal. As soon as the cable is processed, the grippers open and the cable can be removed by the operator.

Processing Capabilities |

- Stripping of inner conductor
- Stripping and pointing of inner conductor (angle 60° or 90°)
- Stripping of outer conductor
- Stripping of inner and outer conductor
- Stripping of inner and outer conductor and pointing of inner conductor
- Stripping and pointing of inner conductor on cable with soldered connector already in place

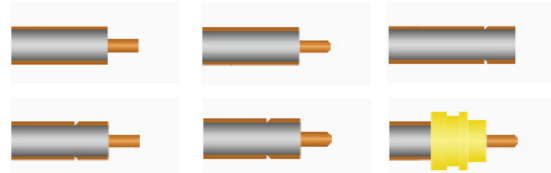

Remark: To prevent damage of the dielectric, the outer conductor is partially turned down, leaving a small web of uncut material. A hand tool supplied with the machine is used to sever the remaining material and the outer conductor will slide off easily.

Technical Specifications |

Cable Diameter	Max. 4.5 mm (0.177") Min. 0.86 mm (0.034")
Stripping Length	Max. 30 mm (1.18")
Increments	Length: 0.01 mm (0.00039") steps Diameter: 0.01 mm (0.00039") steps
Stripping Blades	For turning and removing: 2 pcs. For turning: 2 pcs. (1 each) For pointing: 1 set (4 pcs.)
Cycle Rate	> 3 s, (depending upon cable type and programming)
Program Capacity	1'000 cables
Interfaces	2x USB "Host", Footpedal, Ethernet (on request)
Noise Level	< 70 db (A)
Power Supply	100/115 VAC, 230/240 VAC, 150 VA, 50/60 Hz
Air Pressure	6 bar / 0.6 MPa / 87 psi
Air Consumption per Cycle	7-30 l at 6 bar (87 psi), (depending upon cable type and programming)
Dimensions (L x W x H)	566 x 215 x 252 mm (22.3 x 8.5 x 9.9")
Weight	Net 19.5 kg (43 lbs)
CE – Conformity	The SemiRigid 1050 fully complies with all CE and EMC equipment guidelines relative to mechanical and electrical safety and electromagnetic compatibility.
Important Note	Schleuniger recommends that wire samples be submitted in cases where there is doubt as to the processing capabilities of a particular machine.

Technical Specifications subject to change © Schleuniger Group 3608 Thun, Switzerland / SR_1050_DS_EN_A4_V1

